
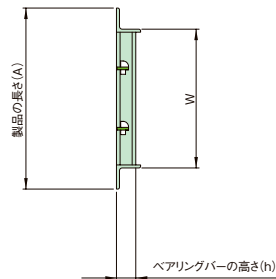



組構式 U字溝用スチールグレーチング

スチールグレーチング

GTU

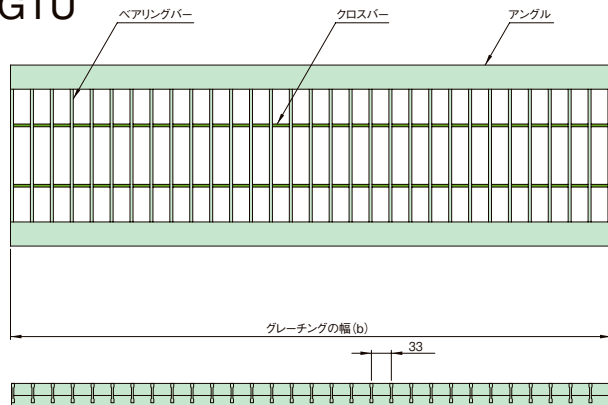

プレキャスト鉄筋
コンクリート製品
側溝
JIS A 5372 附属書5
上ふた式U形側溝



■コンクリート二次製品寸法表

種類	呼び名	寸法 (mm)			
		a	b	c	d
1種 (歩道用)	150	150	140	150	30
	180	180	170	180	35
	240	240	220	240	45
2種 (車道用)	300A	300	260	240	50
	300B			300	
	300C			360	
	360A	360	310	300	50
	360B			360	
	450	450	400	450	55
	600	600	540	600	70

■部品構成表

部品名	材質	表面処理
グレーチング	SS400	溶融亜鉛めっき HDZ177<63>

■側溝用

(単位: mm)

適用荷重	溝幅	型式記号	グレーチング寸法 b × W × h	製品長さ A	アングル 寸法	質量 (kg/枚)	価格(円)
	120	GTU 25-12 	995×110×25	180	L40×40×5	8.1	7,200
	150	GTU 25-15	995×140×25	210	L40×40×5	9.4	8,500
	180	GTU 32-18	995×170×32	240	L40×40×5	11.1	10,000
	200	GTU 32-20	995×190×32	260	L40×40×5	11.7	10,400
	240	GTU 38-24	995×230×38	300	L40×40×5	14.0	12,600
	180	GTU 25-18	995×170×25	240	L40×40×5	10.1	8,900
	200	GTU 32-20	995×190×32	260	L40×40×5	11.7	10,400
	240	GTU 32-24	995×230×32	300	L40×40×5	12.9	11,100
	300	GTU 38-30	995×290×38	360	L40×40×5	16.6	14,500
	120	GTU 19-12 	995×110×19	180	L40×40×5	7.4	7,100
	150	GTU 19-15	995×140×19	210	L40×40×5	8.7	7,700
	180	GTU 19-18	995×170×19	240	L40×40×5	9.3	8,000
	200	GTU 25-20	995×190×25	260	L40×40×5	10.5	9,200
	240	GTU 25-24	995×230×25	300	L40×40×5	11.4	10,000
	300	GTU 32-30	995×290×32	360	L40×40×5	15.1	13,300
	360	GTU 38-36	995×350×38	420	L40×40×5	18.7	16,200
	300	GTU 25-30	995×290×25	360	L40×40×5	13.3	12,400
	240	GTU 19-24	995×230×19	300	L40×40×5	10.6	9,000
	300	GTU 19-30	995×290×19	360	L40×40×5	12.1	11,000

 はクロスバーが付きません

